

## LTL885S 885nm Infrared Collimated Lasers

### Detailed Specification

Output Wavelength	885nm±10nm
Output Power	800~4000mW
Beam Mode	TE <sub>00</sub>
Longitude Mode	Multiple
Operating Mode	CW
Beam Divergence, Full Angle	2.5 ± 0.1mrad
Beam Diameter (1/e <sup>2</sup> ) @ Exit	5x8mm
Power Stability	3% (rms, over 4 hours, T= 25°C)
Modulation	Analog (10KHz) or TTL modulation (10KHz, 30KHz optional )

### Application

- Polarization maintaining fiber coupling
- Non-Gaussian laser line output
- Medical application
- Laser shows
- High-resolution printing
- Laser-induced fluorescence

### Features

- Near TEM<sub>00</sub> mode, round beam spot
- Current visible LED display
- ESD protection
- Power adjustable
- LD temperature stabilized
- LD full current protection


### OEM Service and Design

- [1] 0.1mrad ~ 1.0mrad beam divergence is available upon request.
- [2] Ultra-Stability (<1% rms, over 24 hours, 25°C) is available upon request.
- [3] polarization maintaining fiber coupling or single mode fiber coupling is available upon request
- [4] Non-Gaussian laser line output (fan angle: 7° ~90° , line uniformity best down to 10%) is available upon request
- [5] Removable Powell lenses or fibers is available upon request
- [6] 30KHz TTL modulation (0=laser off, 1=laser on) or 10KHz Analog modulation (0~5VDC) is available upon request.
- [7] TTL+ (0=laser off, 1=laser on), TTL-(0=laser on, 1=laser off) is available upon request
- [8] Other OEM design or service is available upon request

### Reliability

Warm Up Time	<10minutes
Operating Temperature, Case	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C
Expected Operation Lifetime	10000 hours
Warranty	12 months

### Mechanical Drawing (Laser Head)

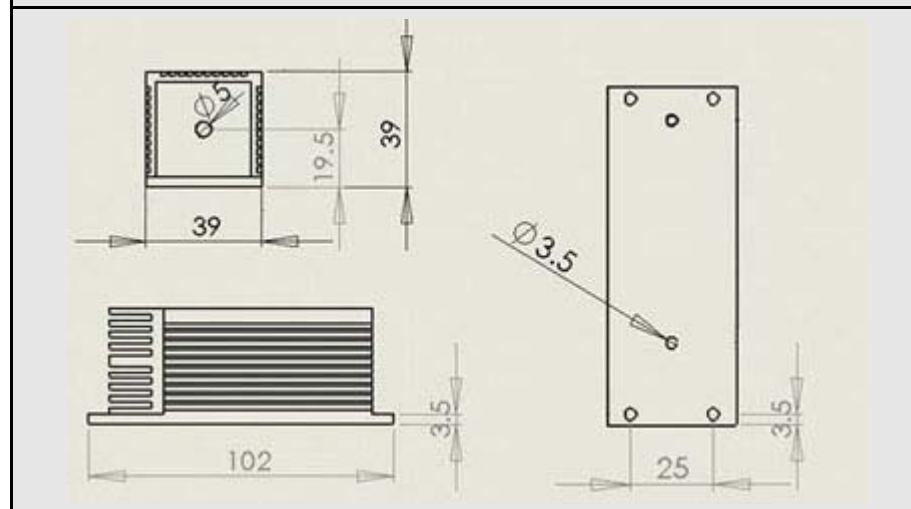

### Mechanical Parameter

Dimensions of Laser Head	102× 39 × 39mm		
Weight of Laser Head	0.5Kg		
Power Supply	ADR-1800	ADR-1805	DDR-2000
	FDA PSU	LED Current Visible PSU	12VDC Driver
Dimensions of Power Supply	110 × 150 × 48mm	110 × 150 × 55mm	105 × 72 × 30mm
Input Voltage	85~240VAC, 50/60Hz	85~240VAC, 50/60Hz	12VDC

Mechanical Drawing

DDR-2000



ADR-1800




ADR-1805




Mechanical Drawing


DDR-2000

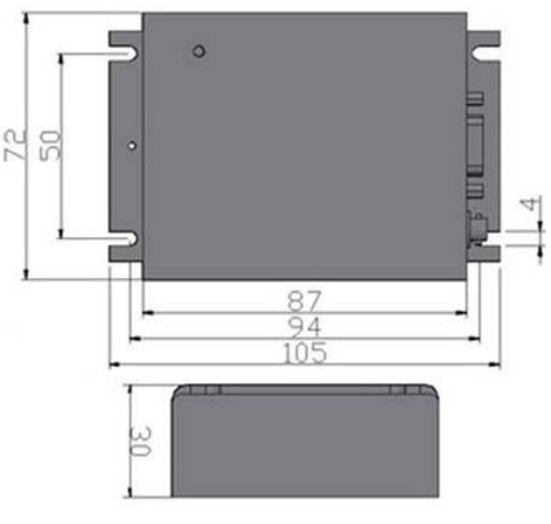

ADR-1800

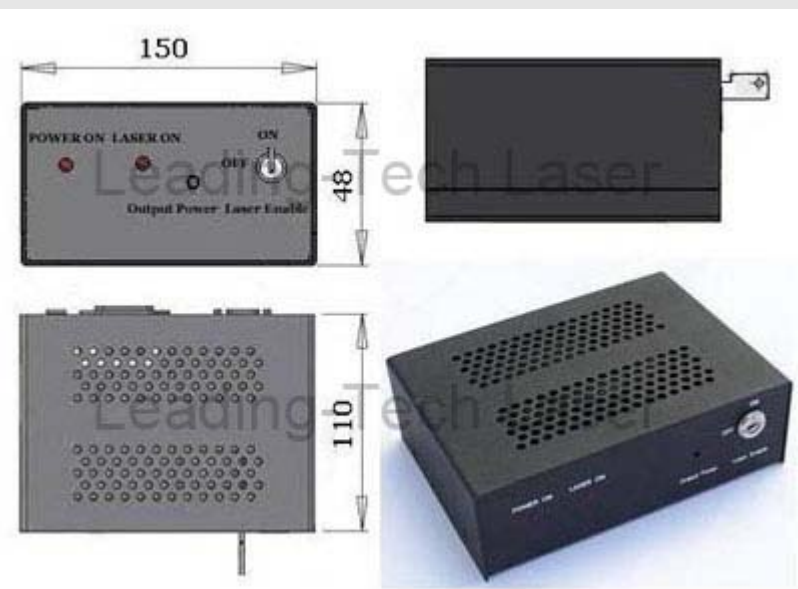

ADR-1805

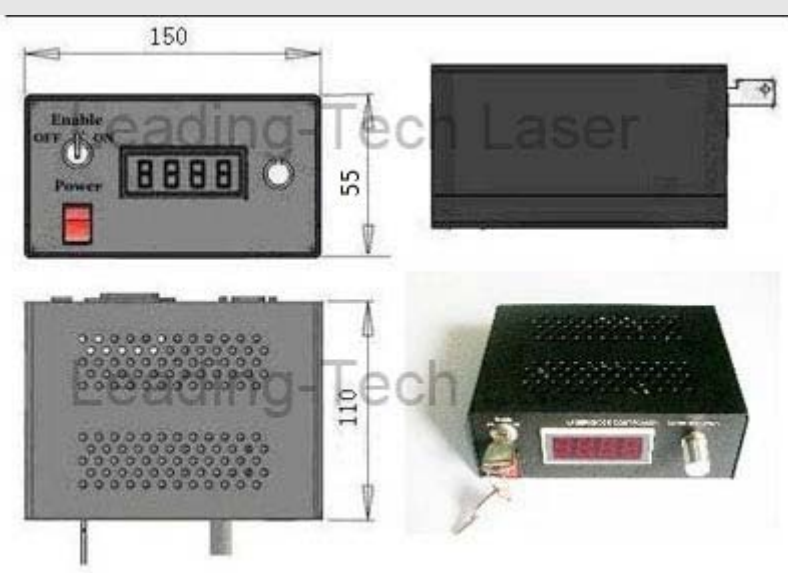

Leading-Tech Laser Co.,LTD

Email: [sale@leading-techlaser.com](mailto:sale@leading-techlaser.com)

Website: [www.leading-techlaser.com](http://www.leading-techlaser.com)

Leading-Tech Laser has been the professional manufacturers and original suppliers of DPSS Lasers with top quality, unbeatable prices, prompt delivery and the best technical support and services for the customers all over the world.